




**Spiral Wound gaskets (CALVO SEALING OR and OR/IR) SMA-04 and SMA-05
(Standard ASME B16.20)**

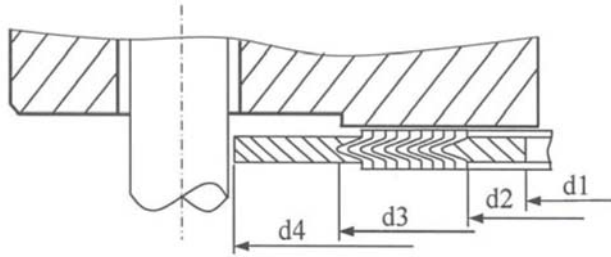

**Pressure Class (Lbs) 150 ASME
B16.20**


Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)
1/2"	48 x32x19x14	3"	137x121x102x81	14"	451x406x372x349
3/4"	57x40x25x21	4"	175x149x127x106	16"	514x464x422x400
1"	67x48x32x27	5"	197x178x156x132	18"	549x527x475x449
1 1/4"	76x60x48x38	6"	222x210x183x157	20"	607x578x526x500
1 1/2"	86x70x54x44	8"	279x264x233x216	24"	718x686x629x603
2"	105x86x70x56	10"	340x318x287x268		
2 1/2"	124x99x83x67	12"	410x375x340x318		

**Pressure Class (Lbs) 300 ASME
B16.20**

Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)
1/2"	54 x32x19x14	3"	149x121x102x81	14"	486x406x372x349
3/4"	67x40x25x21	4"	181x149x127x106	16"	540x464x422x400
1"	73x48x32x27	5"	216x178x156x132	18"	597x527x475x449
1 1/4"	83x60x48x38	6"	251x210x183x157	20"	654x578x526x500
1 1/2"	95x70x54x44	8"	308x264x233x216	24"	775x686x629x603
2"	111x86x70x56	10"	362x318x287x268		
2 1/2"	130x99x83x67	12"	422x375x340x318		



**Spiral Wound gaskets (CALVO SEALING OR and OR/IR) SMA-04 and SMA-05
(Standard ASME B16.20)**

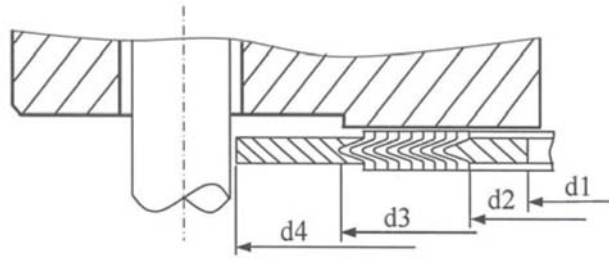

Pressure Class (Lbs) 600 ASME B16.20


Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)
1/2"	54 x32x19x14	3"	149x121x102x79	14"	492x406x362x343
3/4"	67x40x25x21	4"	194x149x121x103	16"	565x464x413x390
1"	73x48x32x27	5"	241x178x148x128	18"	613x527x470x438
1 1/4"	83x60x48x38	6"	267x210x175x155	20"	683x578x521x489
1 1/2"	95x70x54x44	8"	321x264x226x206	24"	791x686x629x591
2"	111x86x70x56	10"	400x318x275x255		
2 1/2"	130x99x83x67	12"	457x375x327x307		

Pressure Class (Lbs) 900 ASME B16.20

Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)
1/2"	64 x32x19x14	3"	168x121x95x79	14"	521x400x356x321
3/4"	70x40x25x21	4"	207x149x121x103	16"	575x457x413x375
1"	80x48x32x27	5"	248x178x148x128	18"	638x521x464x425
1 1/4"	89x60x40x33	6"	289x210x175x155	20"	699x572x521x483
1 1/2"	99x70x48x41	8"	359x257x222x197	24"	838x679x629x591
2"	143x86x59x52	10"	435x311x276x246		
2 1/2"	165x99x70x64	12"	499x368x324x292		



**Spiral Wound gaskets (CALVO SEALING OR and OR/IR) SMA-04 and SMA-05
(Standard ASME B16.20)**

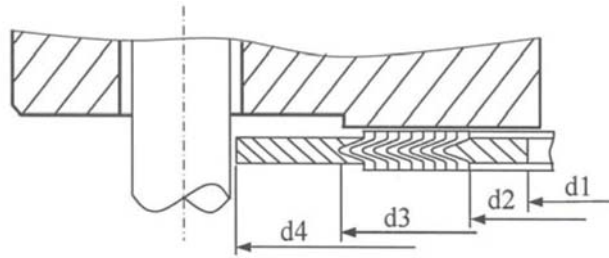

Pressure Class (Lbs) 1500 ASME B16.20

Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)
1/2"	64 x32x19x14	3"	175x121x92x79	14"	578x400x362x321
3/4"	70x40x25x21	4"	210x149x118x98	16"	641x457x406x368
1"	80x48x32x27	5"	254x178x143x124	18"	705x521x464x425
1 1/4"	89x60x40x33	6"	283x210x171x147	20"	756x572x514x476
1 1/2"	99x70x48x41	8"	353x257x216x197	24"	902x679x616x578
2"	143x86x59x52	10"	435x311x267x246		
2 1/2"	165x99x70x64	12"	521x368x324x292		

Pressure Class (Lbs) 2500 ASME B16.20

Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)	Nominal Pipe diameter	Dimensions (d4 d3 d2 d1)		
1/2"	70 x32x19x14	3"	197x121x92x79		
3/4"	76x40x25x21	4"	235x149x118x98		
1"	86x48x32x27	5"	279x178x143x124		
1 1/4"	105x60x40x33	6"	318x210x171x147		
1 1/2"	118x70x48x41	8"	387x257x216x197		
2"	146x86x59x52	10"	476x311x270x246		
2 1/2"	168x99x70x64	12"	549x368x318x292		